



RegalFrame® & Deluxe Specifications

5 Point Mitre Joint

A 5 point mitre joint for superior strength which leaves a fantastic accurate finish.

Hinges

Standard 1.6 zinc-plated 100 x 75 hinges are used on all frames. Other hinges are available on request.

Back Openings

JDS can supply doorframes in two back openings. 95mm for Modular Bricks 114mm for Standard Bricks

Brick Ties


All frames are supplied with brick ties upon delivery.

Stud Frame Clips

Stud frame clips are available when the frame is being used with a steel or timber wall framing stud system. Extra charge applies.

General Information

The frame dimensions and back openings cannot be changed. The height and width of the doorframes can be changed to meet your requirements. The maximum door thickness is 38mm. Frames can be prepared for screw fix hinges.

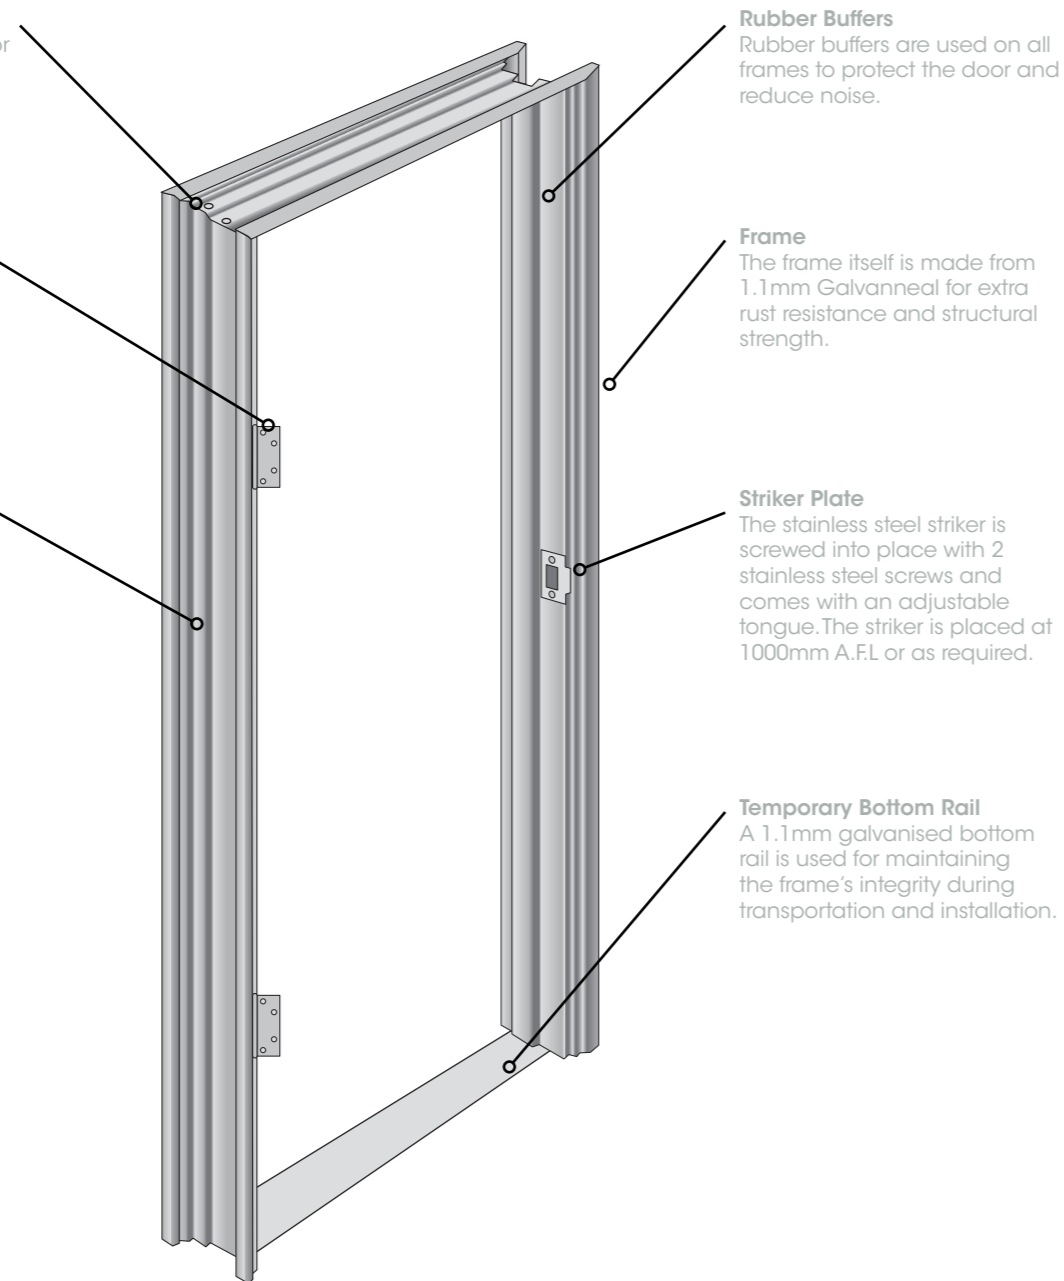

Note: all frames are designed for doors 35 - 38mm. Thinner doors may cause the door to rattle.

The best way to determine if a frame is a left or right hand opening is to stand and face the door so that it opens towards you. If the hinges are on the right hand side then the frame is a right hand opening frame. If the hinges are on the left the frame is a left hand opening frame.

Right hand opening


Left hand opening



Standard single

Comes with 2 hinges and a standard striker.

Right hand opening




Left hand opening



Standard double

Comes with 2 hinges on both sides.



Standard triple

Comes with 6 hinges, a mullion and striker, with fixed bottom rail




Right hand opening



Standard quad

Comes with 8 hinges and a mullion, with fixed bottom rail.



5 and 6 door combinations are also available

