


Standard Split


metal doorframes

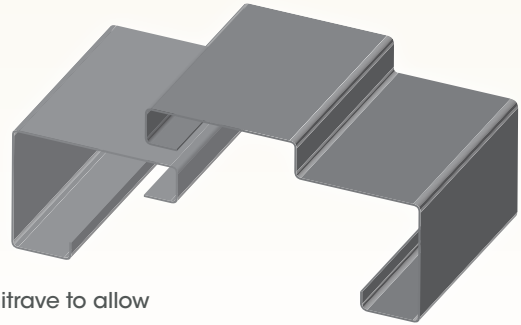

JDS Split metal doorframe profile is designed with a 50mm architrave to allow the counter sunk screw to pick up the concrete or brickwork a lot easier. This frame can be installed to stud, brick, block and concrete construction.

Technical Specifications

The JDS Split Metal Doorframe is made from a 1.2mm Zincanneal. The frames come in 2 separate fully welded sections that are strapped together for transport. When unpacked you simply place on either side of the wall and push together until it stops. The split frame is already square so you simply then need to screw to the wall and bog up the holes. The split frame is available in all standard sizes and can also be made to suit special heights and widths.

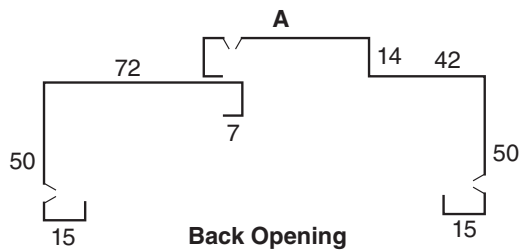

Standard Frame Dimensions

Back Opening	A
85 - 125	60
125 - 150	85

Also available in:
70 - 85mm back opening
150 - 200mm back opening
200mm+ back opening

Formula for stud opening sizes:

Add 40mm to your door HEIGHT and WIDTH (single and double doorframes only)

Examples:

Door sizes	Stud opening
2040 x 820mm	2080 x 860mm
2040 x 720mm	2080 x 760mm
2040 x 620mm	2080 x 660mm

Add a further 40mm to your door width for each mullion when using triple, quad or five door combinations.

Note: A minimum nib on each side of the stud opening is needed to allow for the split frame to be screwed to the stud work